




GALUCHO



BGM / BGH / BROCADORAS-PERFURADORAS
AXIAIS E DESCENTRADAS
MONTAGEM NOS 3 PONTOS



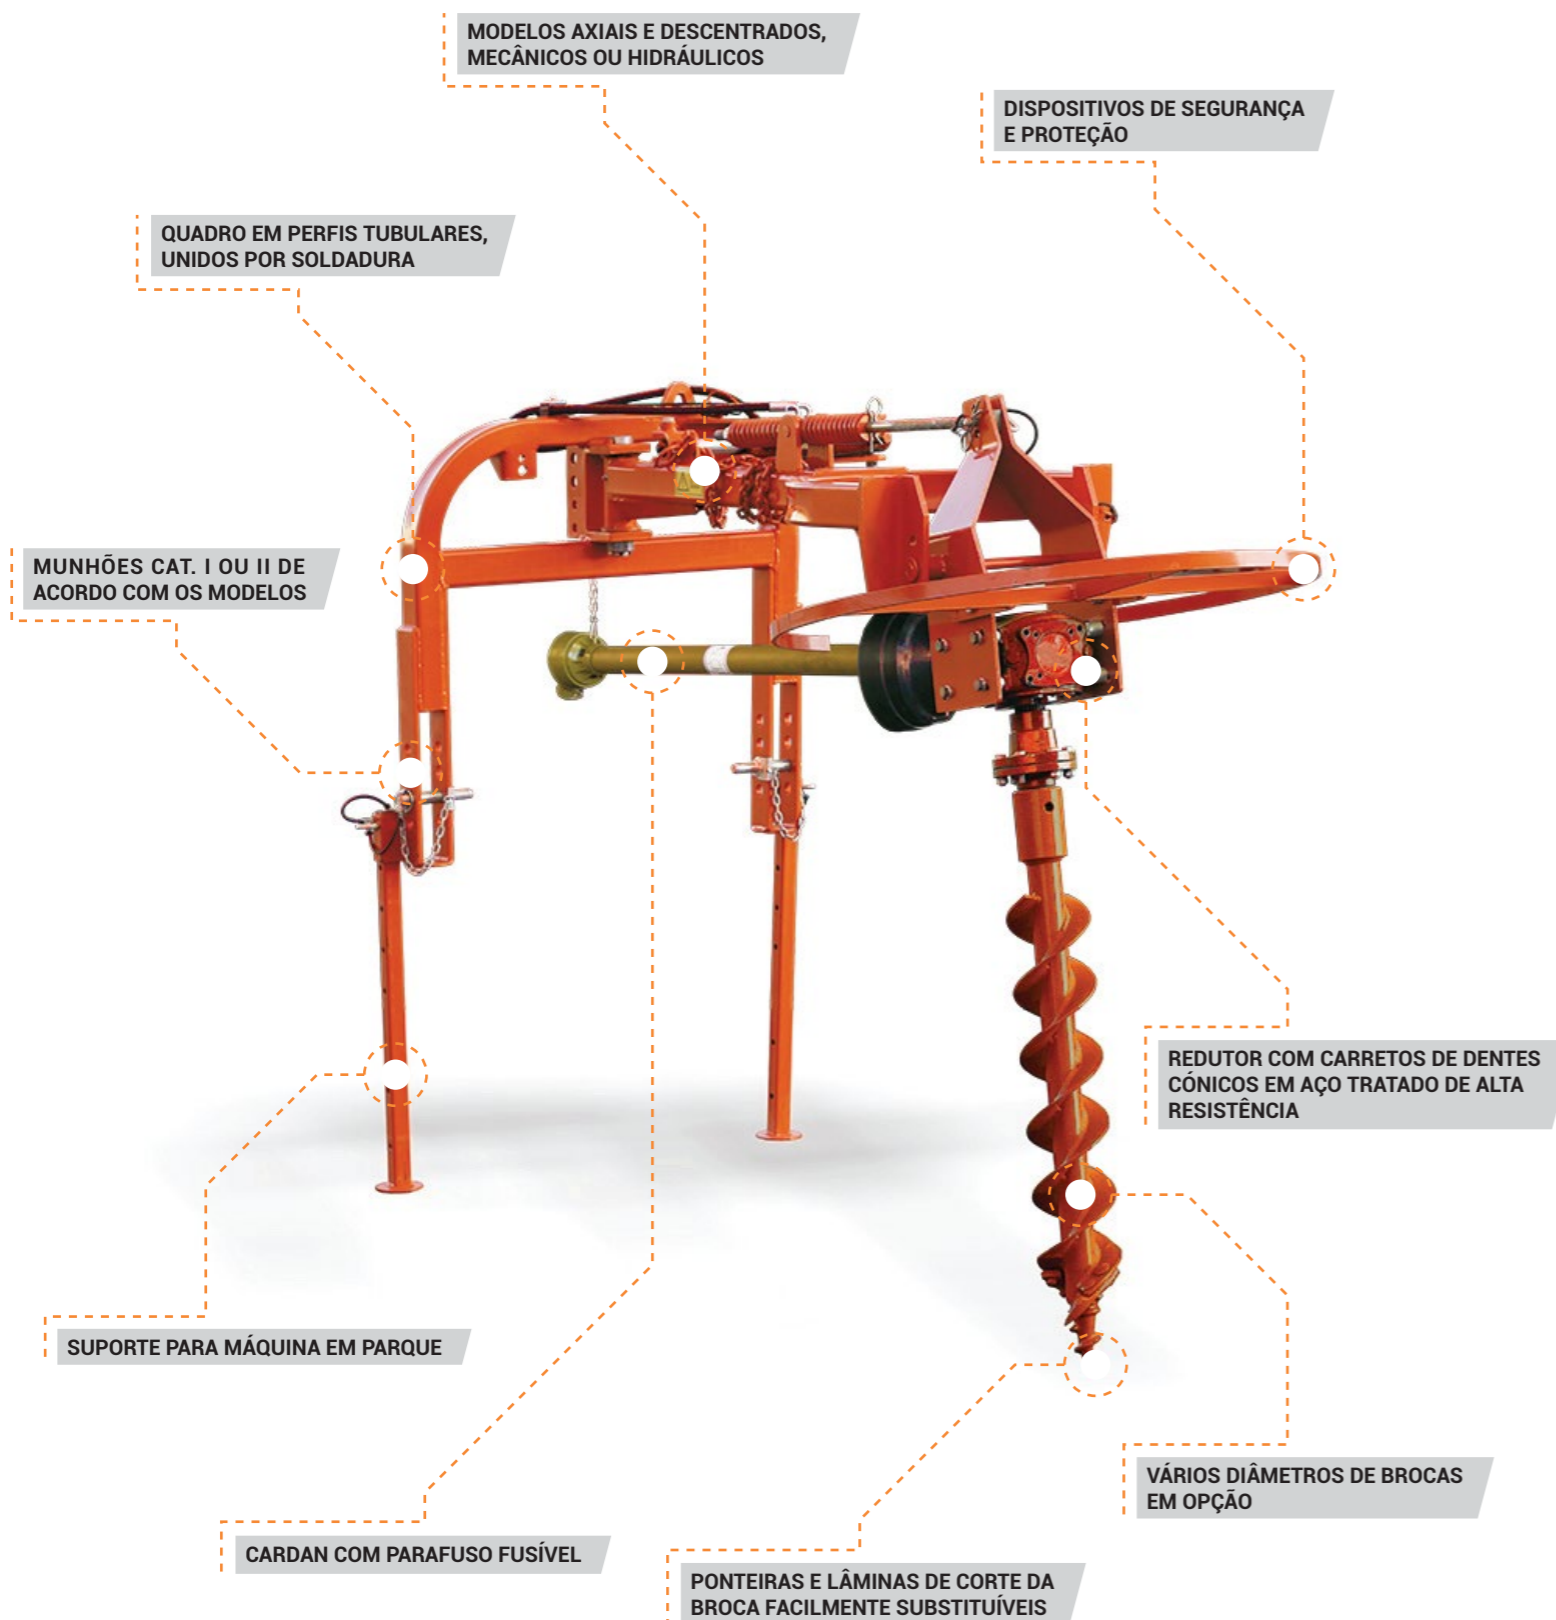




ESPECIFICAÇÕES



DEMONSTRAÇÃO EXEMPLIFICATIVA



CARATERÍSTICAS TÉCNICAS

						
			(") (cm)	m	KG	POTÊNCIA RECOMENDADA A 540 R.P.M. DA T.D.F.
294250000	BGM	AXIAL	—	—	207***	30-50
294250002	BGM-IH**	AXIAL	—	—	232***	30-50
294250003	BGH	AXIAL	—	—	221***	30-50
294250005	BGH-IH**	AXIAL	—	—	247	30-50

BROCAS

294211000	BROCA 6	—	6	15	1,00	20	—
294292000	BROCA 8	—	8	20	1,00	25	—
294212000	BROCA 12	—	12	30	1,00	30	—
294213000	BROCA 18	—	18	45	1,00	58	—
294214000	BROCA 24	—	24	60	1,00	64	—
294291000	BROCA 32	—	32	80	1,00	110	—

As brocadoras podem utilizar qualquer diâmetro de broca

* IM = Inversor de marcha, mecânico

** IH = Inversor de marcha, hidráulico

*** Transmissão incluída no peso

EQUIPAMENTO OPCIONAL

294215000 Extensão de 300 mm p/ qualquer broca

294216000 Extensão de 400 mm p/ qualquer broca

294217000 Extensão de 500 mm p/ qualquer broca

