





# GALUCHO





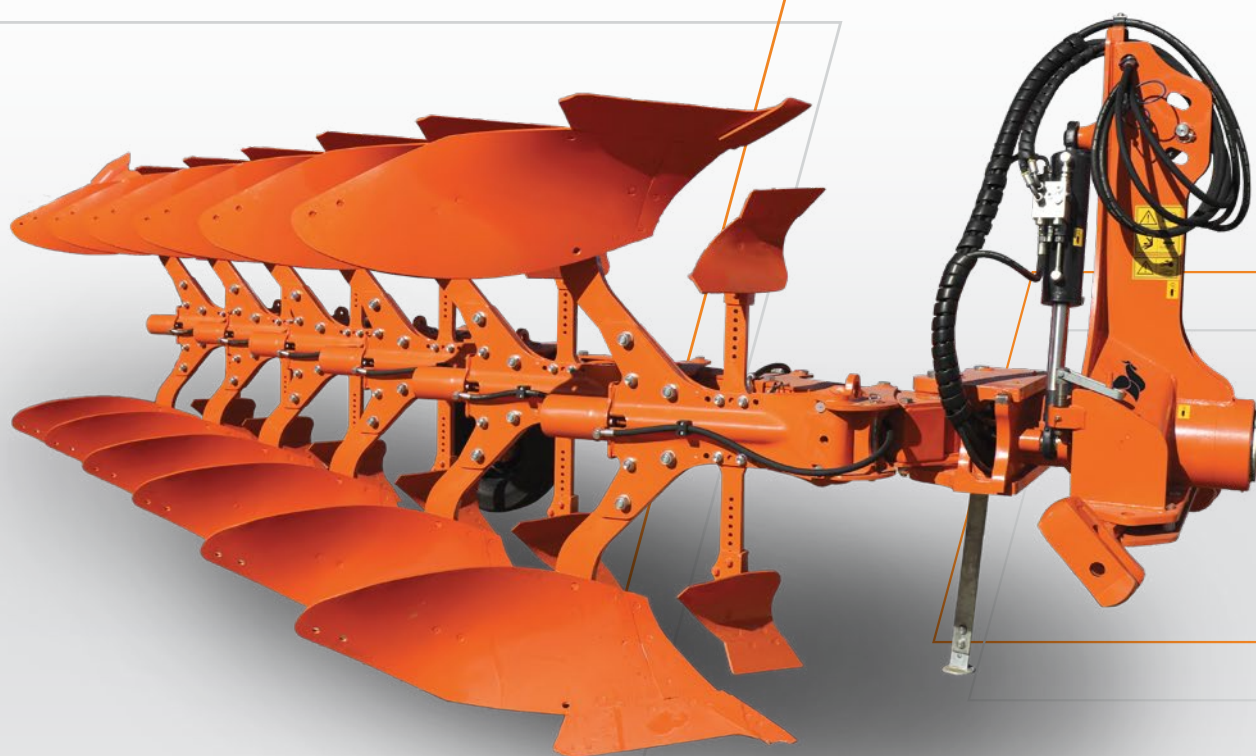

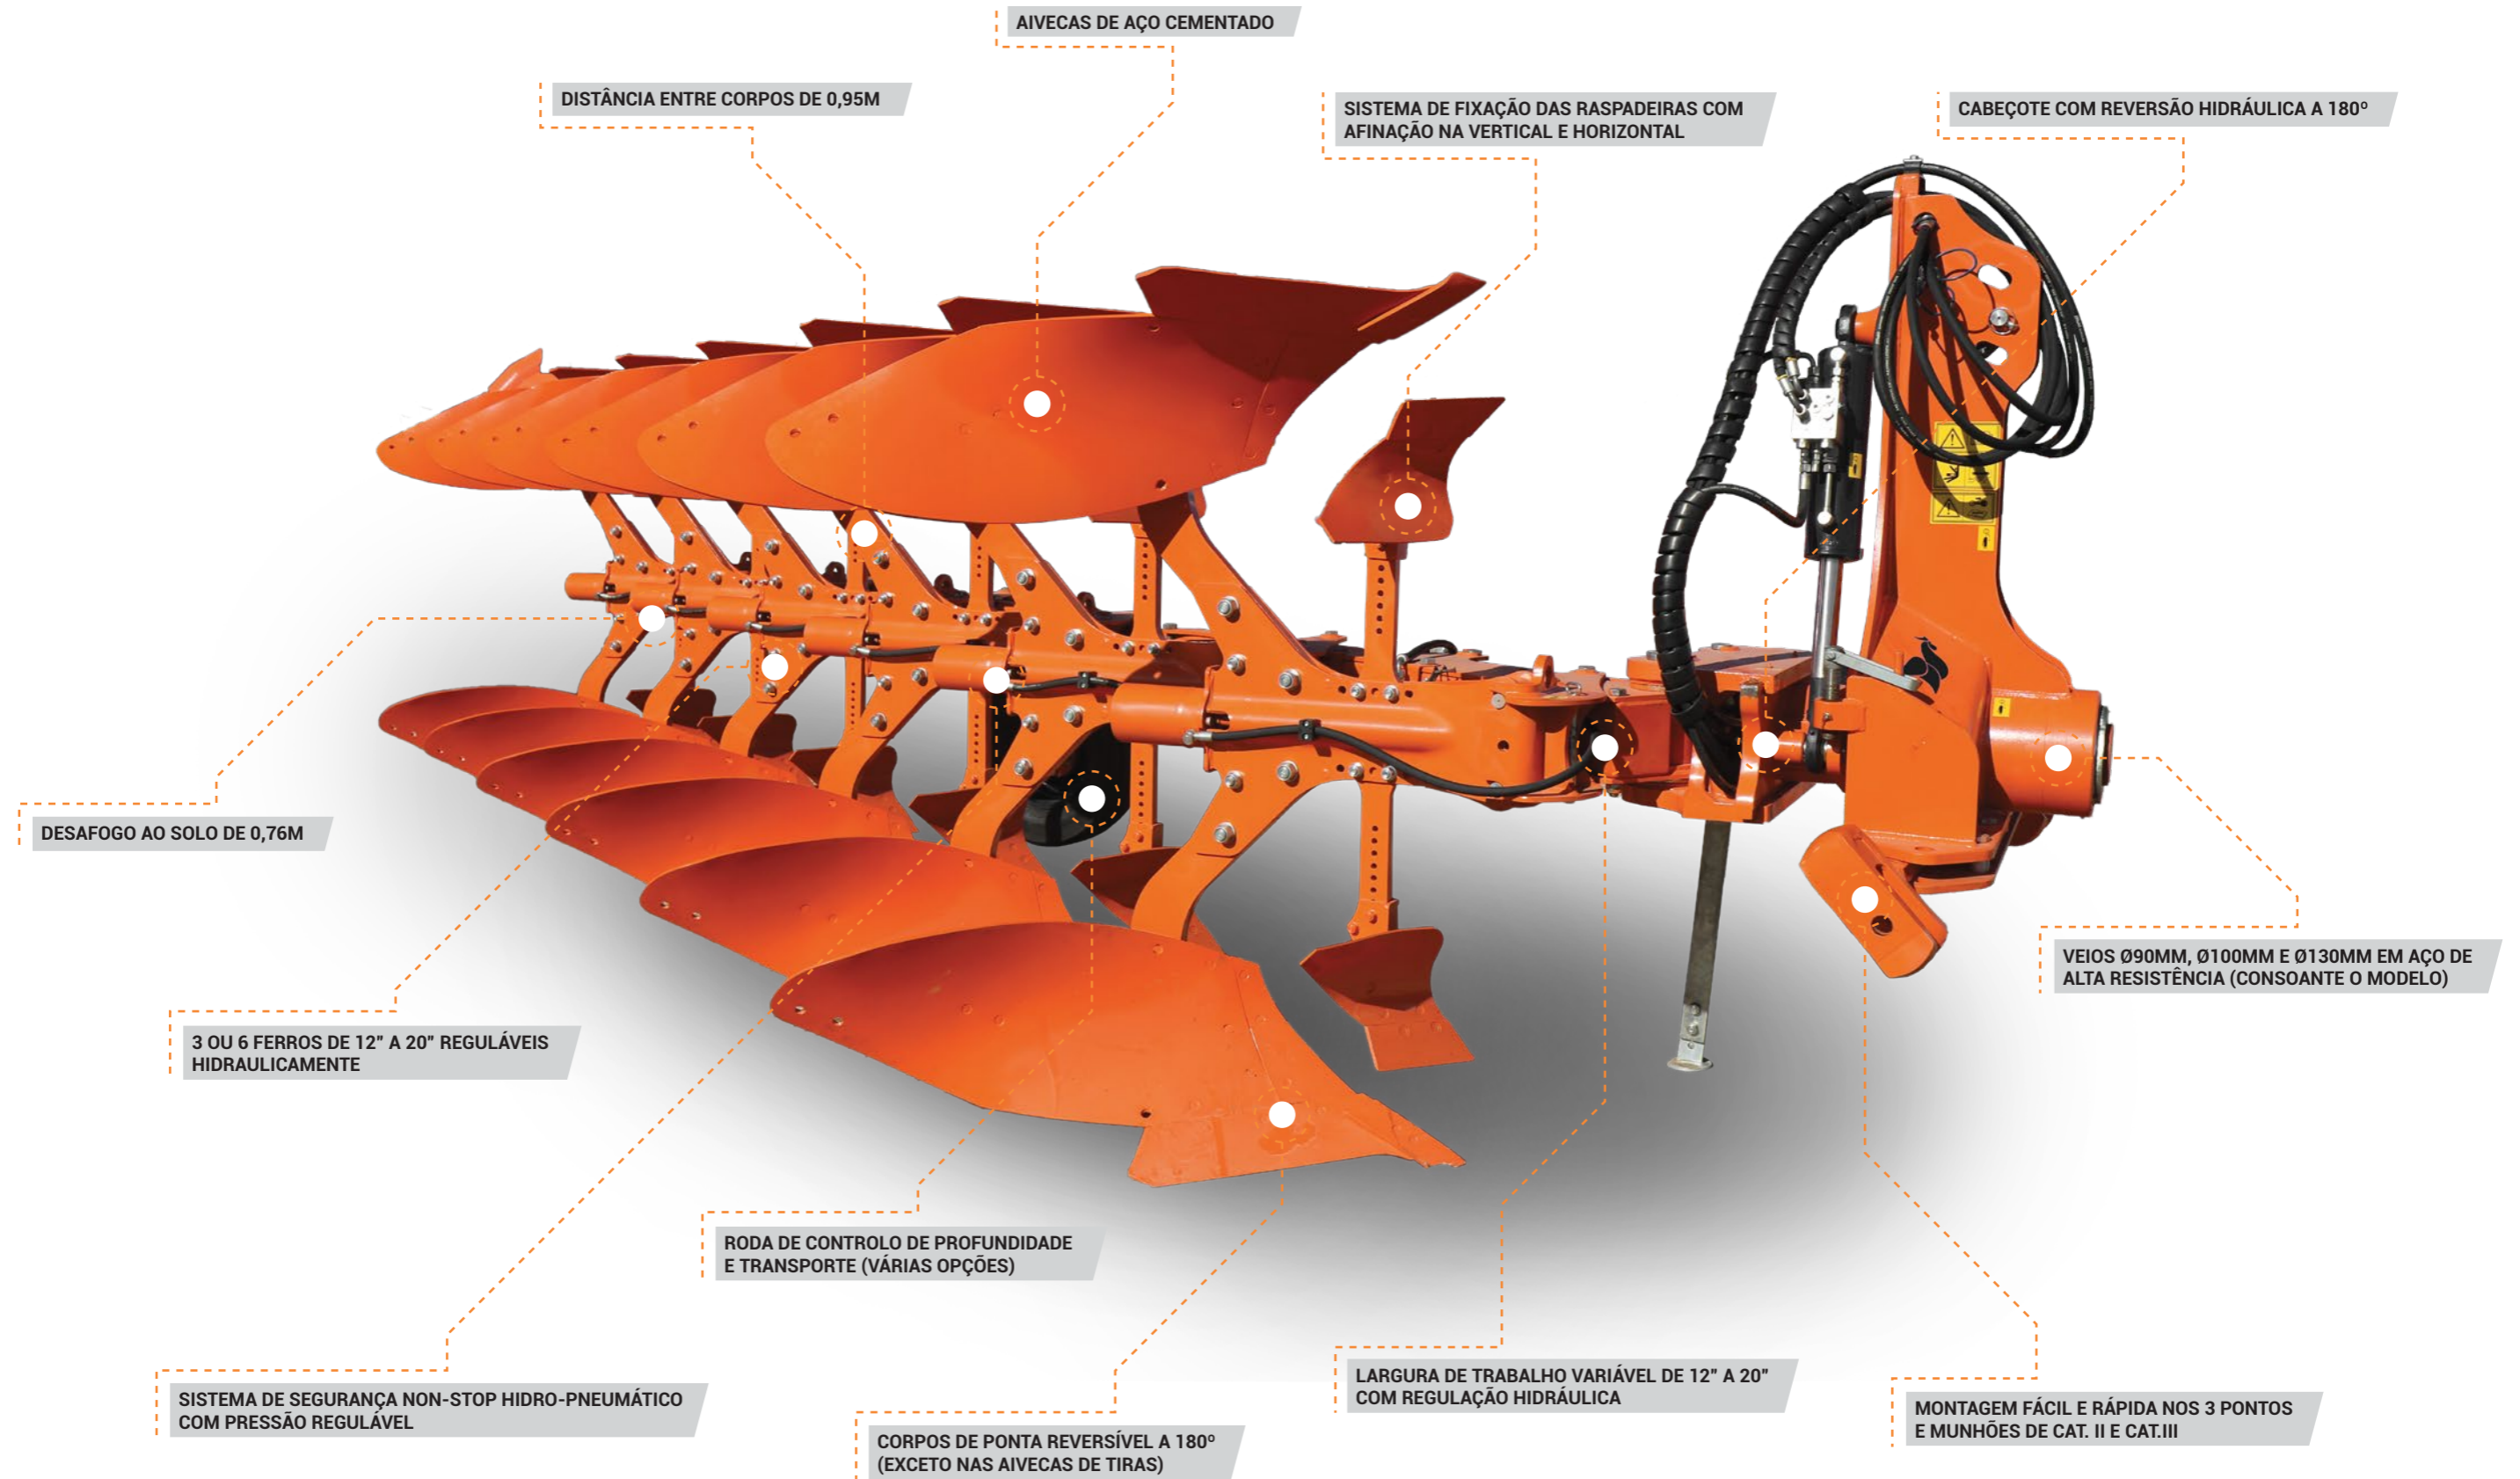


**CGFH** / CHARRUAS DE 3 A 6/7 FERROS  
REVERSÃO HIDRÁULICA  
CORPOS DE PONTA REVERSÍVEL A 180°  
NONSTOP HIDRO-PNEUMÁTICO  
MONTAGEM NOS 3 PONTOS

## ESPECIFICAÇÕES



## CARATERÍSTICAS TÉCNICAS

						
		Nº	mm	mm		Cv
214000000	CGFH 3/4	3	915-1525	950	1490	100-150
214030000	CGFH 4/5	4	1220-2030	950	1940	150-200
214050000	CGFH 5/6	5	1525-2540	950	2365	170-240
214070000	CGFH 6	6	1830-3550	950	2665	200-240

## EQUIPAMENTO OPCIONAL

214002000 **Acrescento + um corpo completo**

214033000 **Raspadeiras (par)**

213452500 **Defletores - (par)**

214004000 **Roda controlo prof. 200/60 R14.5**

214034000 **Roda prof./trans. 250/65 R14.5**

214054000 **Roda lateral 200/60 R14.5**

214074000 **Roda lateral prof./trans. 250/65 R14.5**

971152050 **Roda 200/60 R14.5**

971152051 **Roda 250/65 R14.5**

213455501 **Engate automático Cat. II**

213835501 **Engate automático Cat. III**

214007000 **Memória automática 3/4**