




GALUCHO



CGF

CHARRUAS DE 3 A 6 FERROS, REVERSÃO HIDRÁULICA
CORPOS DE PONTA REVERSÍVEL A 180°
LARGURA DE TRABALHO REGULÁVEL
MONTAGEM NOS 3 PONTOS

ESPECIFICAÇÕES

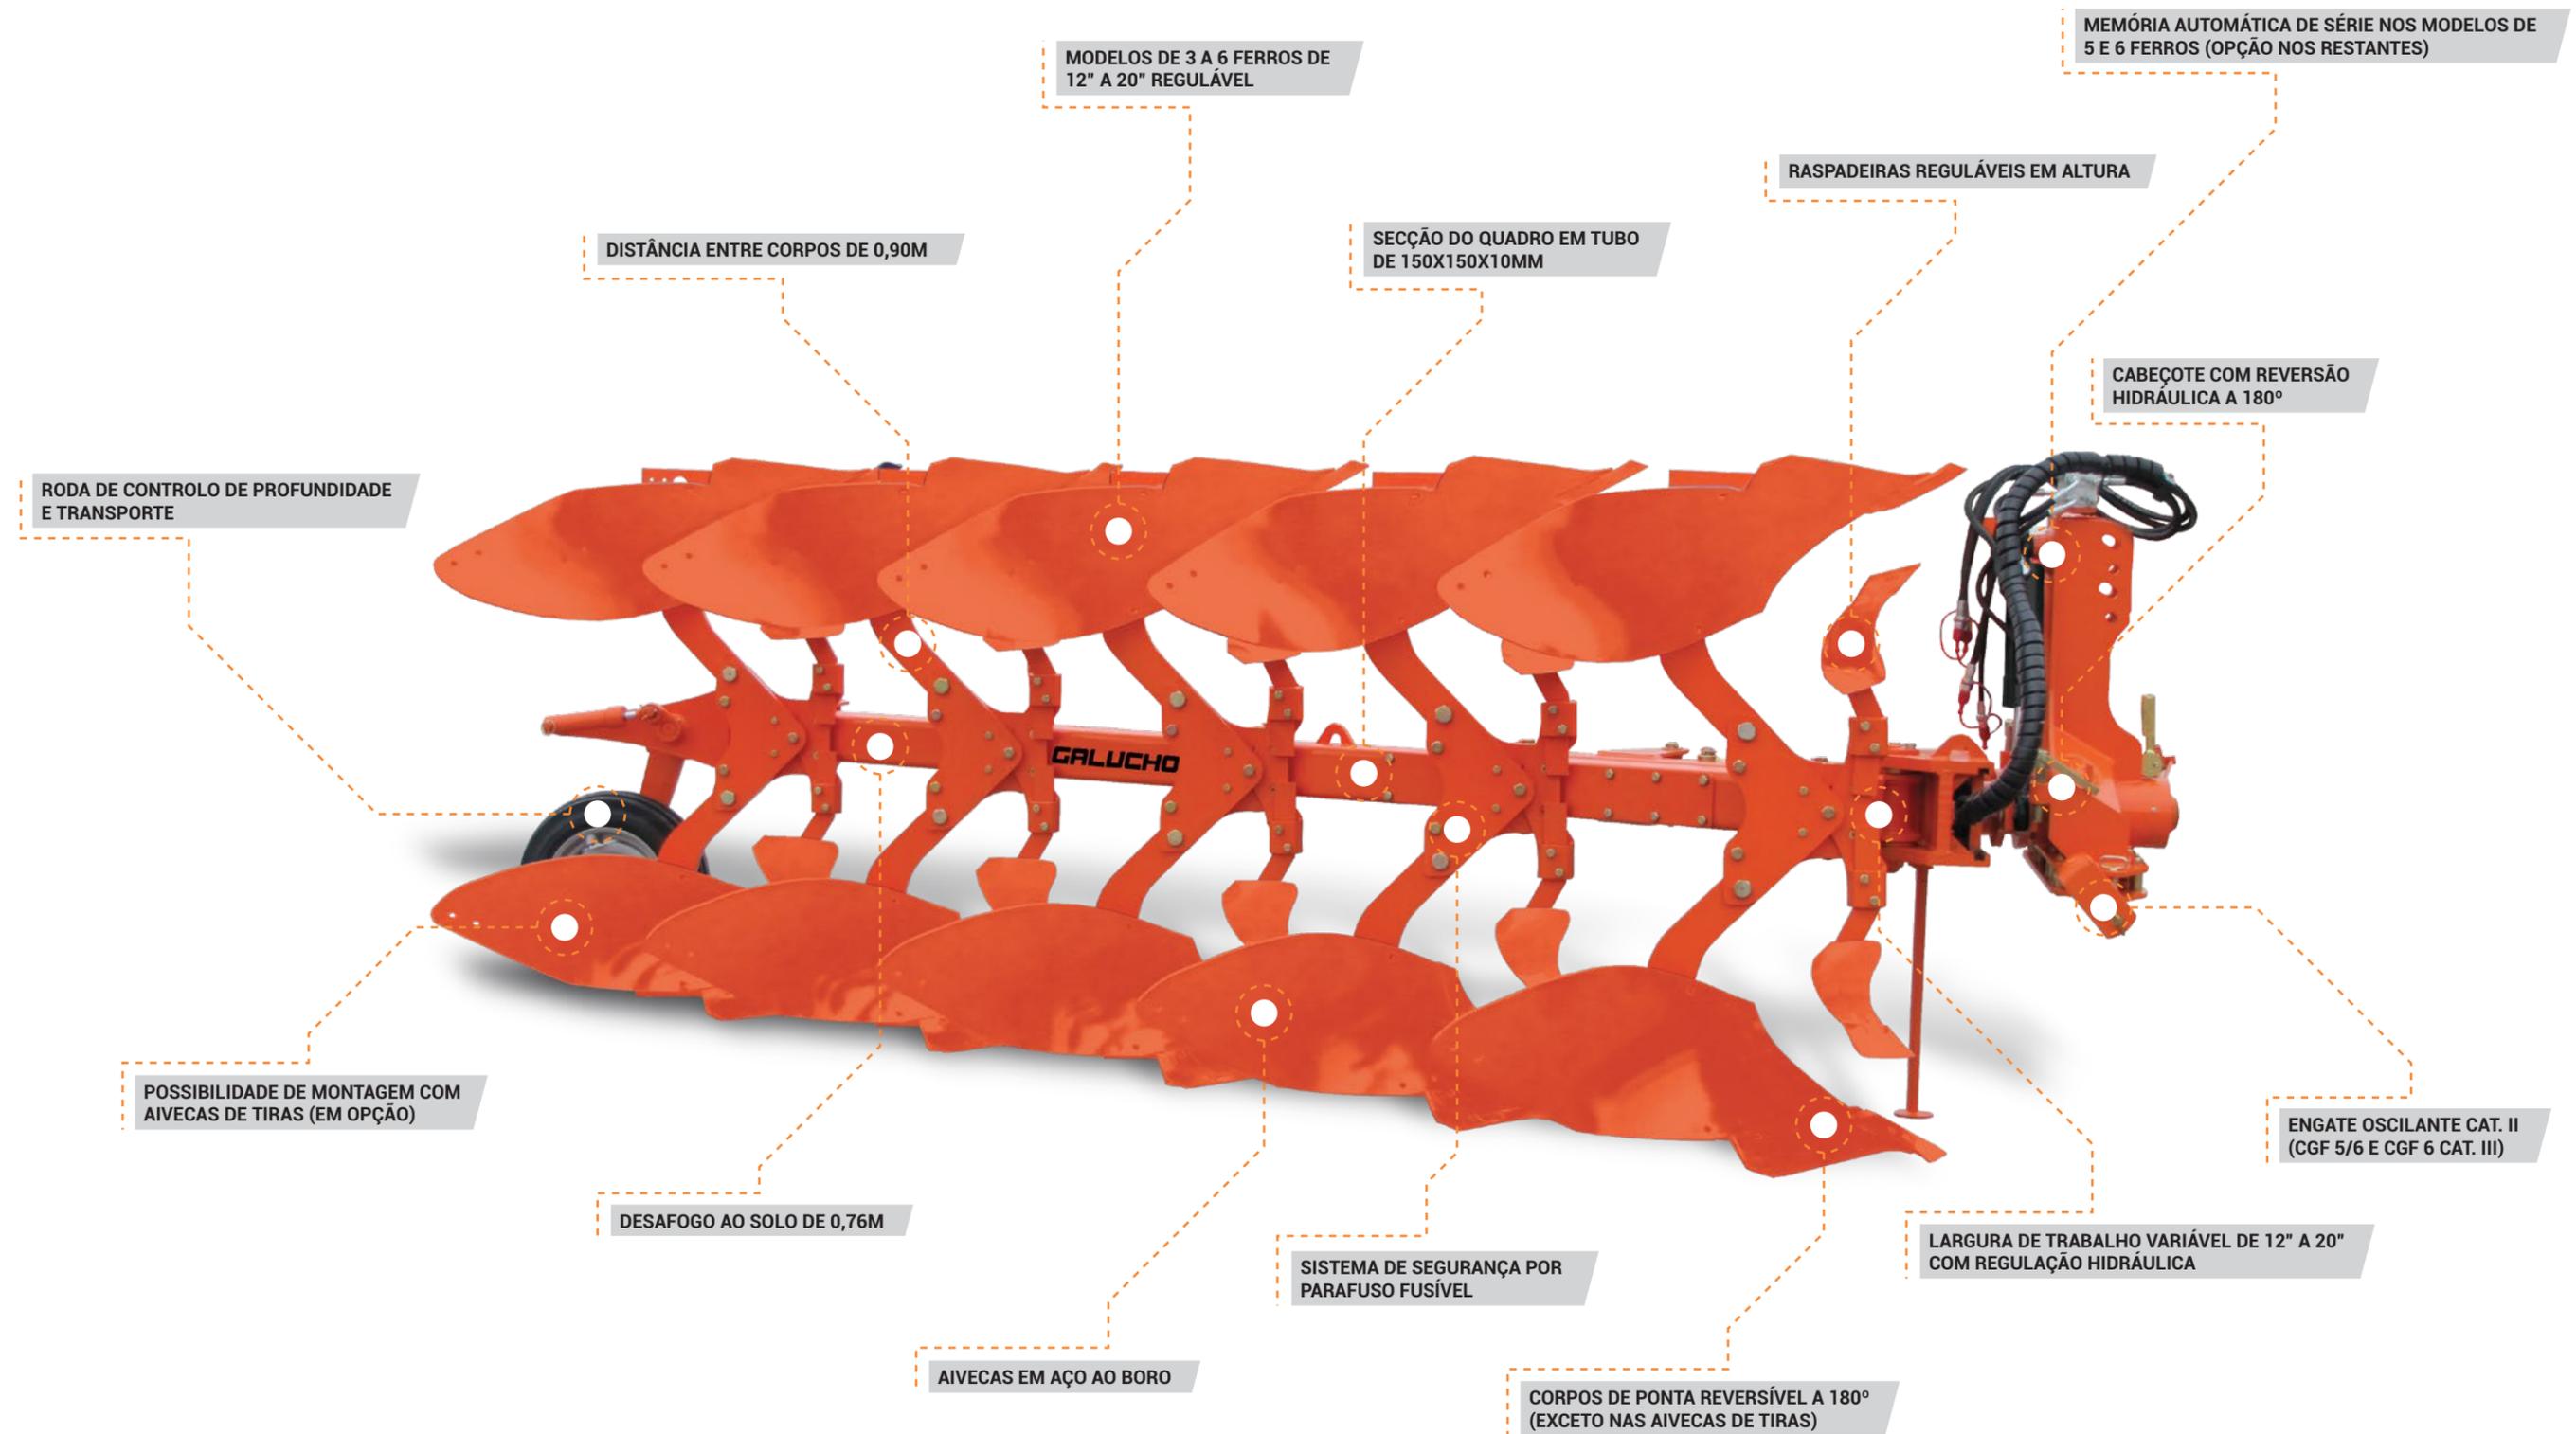

CARATERÍSTICAS TÉCNICAS

								
			m	6.00-9	200/60-14.5	250/65-14.5	KG	Cv
213810002 213810003	CGF 3/4-3		0,90-1,50	OP.	-	-	1200	100-130
213820002 213820003	CGF 4/5-4		1,20-2,00	ST.	OP.	OP.	1500	140-200
213830002 213830003	CGF 5/6-5		1,50-2,50	-	ST.	OP.	1900	150-200
213840002 213840003	CGF6		1,80-3,00	-	OP.	ST.	2200	200-260
213810007 213810008	CGF 3/4-4		1,20-2,00	ST.	OP.	OP.	1500	100-150
213820007 213820008	CGF 4/5-5		1,20-2,50	-	ST.	OP.	1900	140-200
213830007 213830008	CGF 5/6-6		1,80-3,00	-	OP.	ST.	2200	170-260

* Todos os códigos de cor azul são referentes ao modelo com raspadeiras.

EQUIPAMENTO OPCIONAL

213453011 Conjunto Raspadeiras - (par)

213812001 Memória automática p/ abertura hidráulica

213452500 Defletores - (par)

213815000 Ferro suplementar p/aumentar 1 corpo

213452000 Roda controlo prof. 6.00-9

213813000 Roda prof. + transp. 200/60 - 14.5

213841500 Roda prof. + transp. 250/65 - 14.5

971010261 Pneu c/ Jante 6.00 x 9

971152050 Pneu c/ Jante 200/60 - 14.5

971152051 Pneu c/ Jante 250/65 - 14.5



 GALUCHO - Indústrias Metalomecânicas, S.A.
Avenida Central, N°4 | 2705-737 São João das Lampas | Sintra - Portugal

 geral@galucho.pt

 (+351) 219 608 500

 www.galucho.pt

